


This Conference Control Host is recommended for compatibility with AVFI's **T48-LFT15** Monitor Lift's microphone.

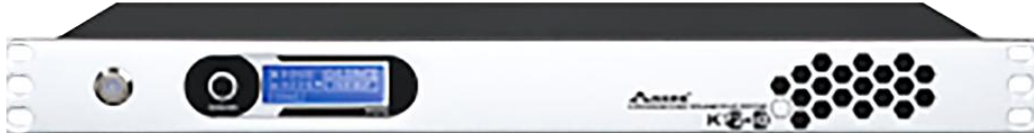

Specifications

- Selection of frequency shift effect switch for microphone and line input
- Independent effect connection port (EFX) for local speakers in the conference system
- Frequency shift: 5 Hz $\pm$ 1 Hz
- 5-14 dB increase in sound transmission gain
- Line input impedance $\geq$ 5K Ω
- Line output impedance $\leq$ 600 Ω
- Frequency response: non frequency shifted state 20 Hz-20K Hz
- Frequency shift status 150 Hz-15K Hz
- Working power supply voltage 2.7-13V
- Mono microphone amplifier
- Equipped with Auto Level Control (ALC) function
- External components can be used to adjust the gain (+20-63dB)
- Use external components to adjust the limiting level (200mVrms~2Vrms)
- Gain switching may be 0dB/20dB]
- Built-in buffer amplifier
- Low input noise voltage 1 μ Vrms
- Built-in high-frequency noise control circuit

External Power Supply: AC 110V

Certifications: CE

1 year warranty.

The information contained in this drawing is the sole property of Audio Visual Furniture International. Any reproduction in part or as a whole without the written permission of Audio Visual Furniture International is prohibited. We can build or modify stock configurations to suit customer specifications. Please contact us to discuss how this service can help meet your needs. Some quantity restrictions may apply. Specification subject to change without notice. Computers, cameras, monitors, etc. are shown to illustrate product usage and are not included unless otherwise noted.